

### Specifications

| Models   | GS-2669 RT |             | GS-3369 RT |             | GS-4069 RT |            |
|--|------------|-------------|------------|-------------|------------|------------|
| Measurements                                   | Metric     | US          | Metric     | US          | Metric     | US         |
| Working height maximum*                        | 9.70 m     | 31 ft 9 in  | 11.75 m    | 38 ft 6 in  | 14.12 m    | 46 ft 3 in |
| <b>A</b> Platform height maximum               | 7.70 m     | 25 ft 3 in  | 9.75 m     | 31 ft 11 in | 12.12 m    | 39 ft 9 in |
| <b>B</b> Platform height - stowed              | 1.47 m     | 4 ft 10 in  | 1.47 m     | 4 ft 10 in  | 1.65 m     | 5 ft 5 in  |
| <b>C</b> Platform length - outside             | 2.79 m     | 9 ft 2 in   | 2.79 m     | 9 ft 2 in   | 2.79 m     | 9 ft 2 in  |
| extended <sup>1</sup>                          | 4.31 m     | 14 ft 2 in  | 4.31 m     | 14 ft 2 in  | 4.31 m     | 14 ft 2 in |
| Slide-out platform extension deck <sup>1</sup> | 1.52 m     | 5 ft        | 1.52 m     | 5 ft        | 1.52 m     | 5 ft       |
| <b>D</b> Platform width - outside              | 1.6 m      | 5 ft 3 in   | 1.6 m      | 5 ft 3 in   | 1.6 m      | 5 ft 3 in  |
| Toeboard height                                | 0.15 m     | 6 in        | 0.15 m     | 6 in        | 0.15 m     | 6 in       |
| <b>E</b> Height - stowed**                     | 2.59 m     | 8 ft 6 in   | 2.59 m     | 8 ft 6 in   | 2.74 m     | 9 ft       |
| rails lowered                                  | 1.92 m     | 6 ft 3.5 in | 1.92 m     | 6 ft 3.5 in | 2.08 m     | 6 ft 10 in |
| <b>F</b> Length - stowed                       | 3.12 m     | 10 ft 3 in  | 3.12 m     | 10 ft 3 in  | 3.12 m     | 10 ft 3 in |
| platform extended <sup>1</sup>                 | 4.50 m     | 14 ft 9 in  | 4.50 m     | 14 ft 9 in  | 4.50 m     | 14 ft 9 in |
| with outriggers                                | 3.76 m     | 12 ft 4 in  | 3.76 m     | 12 ft 4 in  | 3.76 m     | 12 ft 4 in |
| <b>G</b> Width                                 | 1.75 m     | 5 ft 9 in   | 1.75 m     | 5 ft 9 in   | 1.75 m     | 5 ft 9 in  |
| <b>H</b> Wheelbase                             | 2.29 m     | 7 ft 6 in   | 2.29 m     | 7 ft 6 in   | 2.29 m     | 7 ft 6 in  |
| <b>I</b> Ground clearance - center             | 0.24 m     | 9.5 in      | 0.24 m     | 9.5 in      | 0.24 m     | 9.5 in     |

### Productivity

| Maximum platform occupancy (in/out) | 4/4               |           | 4/2          |           | 3/2          |          |
|-------------------------------------|-------------------|-----------|--------------|-----------|--------------|----------|
| Lift capacity                       | 680 kg            | 1,500 lbs | 454 kg       | 1,000 lbs | 363 kg       | 800 lbs  |
| Drive height                        | full height       |           | full height  |           | full height  |          |
| Drive speed - stowed                | 5.6 km/h          | 3.5 mph   | 5.6 km/h     | 3.5 mph   | 5.6 km/h     | 3.5 mph  |
| Drive speed - raised                | 0.5 km/h          | 0.3 mph   | 0.5 km/h     | 0.3 mph   | 0.5 km/h     | 0.3 mph  |
| Gradeability - stowed***            | 40%               |           | 35%          |           | 35%          |          |
| Maximum outrigger levelling:        | front/back uphill |           | 5.3°/4.2°    |           | 5.3°/4.2°    |          |
| side to side                        | 11.7°             |           | 11.7°        |           | 11.7°        |          |
| Turning radius - inside             | 2.11 m            | 83 in     | 2.11 m       | 83 in     | 2.11 m       | 83 in    |
| Turning radius - outside            | 4.6 m             | 181.2 in  | 4.6 m        | 181.2 in  | 4.6 m        | 181.2 in |
| Raise/lower speed                   | 36/33 sec         |           | 42/28 sec    |           | 69/46 sec    |          |
| Controls                            | proportional      |           | proportional |           | proportional |          |
| Drive                               | four wheel        |           | four wheel   |           | four wheel   |          |
| Tyres - rough terrain               | 30x66 cm          | 12x26 in  | 30x66 cm     | 12x26 in  | 30x66 cm     | 12x26 in |

### Power

|                           |  |  |  |
|---------------------------|--|--|--|
| Power source              | Kubota D-1105 Diesel 24.8 hp<br>Perkins 403D-11 Diesel 25 hp | Kubota D-1105 Diesel 24.8 hp<br>Perkins 403D-11 Diesel 25 hp | Kubota D-1105 Diesel 24.8 hp<br>Perkins 403D-11 Diesel 25 hp |
| Fuel tank capacity        | 37.9 L 10 gal  | 37.9 L 10 gal  | 37.9 L 10 gal  |
| Hydraulic system capacity | 68.1 L 18 gal  | 68.1 L 18 gal  | 68.1 L 18 gal  |

### Sound & Vibration Levels


|   |                       |                          |                       |                          |                       |                          |
|---|-----------------------|--------------------------|-----------------------|--------------------------|-----------------------|--------------------------|
| Sound pressure level (ground workstation)   | 85 dBA                | 85 dBA                   | 85 dBA                | 85 dBA                   | 85 dBA                | 85 dBA                   |
| Sound pressure level (platform workstation) | 79 dBA                | 79 dBA                   | 79 dBA                | 79 dBA                   | 79 dBA                | 79 dBA                   |
| Vibration                                   | <2.5 m/s <sup>2</sup> | 8 ft 2 in/s <sup>2</sup> | <2.5 m/s <sup>2</sup> | 8 ft 2 in/s <sup>2</sup> | <2.5 m/s <sup>2</sup> | 8 ft 2 in/s <sup>2</sup> |

### Weight\*\*\*\*

|   |            |           |            |           |            |            |
|---|------------|-----------|------------|-----------|------------|------------|
| CE base machine   | 3,376 kg   | 7,443 lbs | 3,557 kg   | 7,842 lbs | 4,744 kg   | 10,459 lbs |
| The basic unit has the extension deck, foam filled RT tyres (or non marking RT tyres as option), CE link guard and CE load sense. |            |           |            |           |            |            |
| Unit weight modifiers for options   |            |           |            |           |            |            |
| Outriggers  | add 392 kg | 865 lbs   | add 392 kg | 865 lbs   | add 392 kg | 865 lbs    |
| Generator   | add 73 kg  | 160 lbs   | add 73 kg  | 160 lbs   | add 73 kg  | 160 lbs    |

### Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2013);  
2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

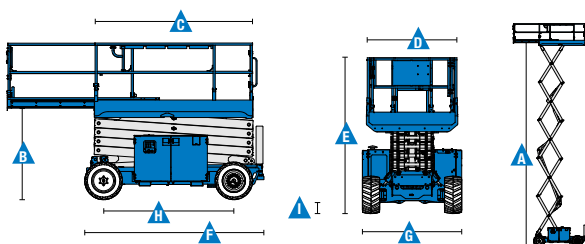

<sup>1</sup> An extension deck of 1.52 m (5 ft) is standard on machines fitted with the standard outriggers

\* The metric equivalent of working height adds 2 m to platform height.

\*\* Based on RT tyres. Deduct 5.8 cm (2 in) for non-marking tyres.

\*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.

### Features

| Standard Features | Easily Configured To Meet Your Needs | Options & Accessories |
|-------------------|--------------------------------------|-----------------------|
|-------------------|--------------------------------------|-----------------------|

#### Measurements

##### GS-2669 RT

- 9.70 m (31 ft 9 in) working height
- Up to 680 kg (1,500 lbs) lift capacity

##### GS-3369 RT

- 11.75 m (38 ft 6 in) working height
- Up to 454 kg (1,000 lbs) lift capacity

##### GS-4069 RT

- 14.12 m (46 ft 3 in) working height
- Up to 363 kg (800 lbs) lift capacity

#### Productivity

- Drive at full height
- Folding guardrail with full height swing gate
- Platform controls with fault indicator
- Proportional lift and drive
- AC power to platform
- Front oscillating axle
- Positive traction control
- Four-wheel braking
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing beacons
- Horn
- Hour meter
- Certified load sensor
- Telematics-Ready Connector

#### Power

- All engines are emissions compliant
- Swing-out engine tray

#### Platform

- 2.79 x 1.60 m (9 ft 2 in x 5 ft 3 in) steel frame platform with replaceable aluminium deck
- 1.52 m (5 ft) slide-out extension deck

#### Outriggers

- Automatic levelling hydraulic outriggers

#### Engine Options

- Kubota diesel 24.8 hp (18.5 kw)
- Perkins diesel 25 hp (19.5 kw)

#### Drive

- 4 x 4

#### Axle

- Front oscillating axle

#### Tyre Options

- Foam-filled rough terrain (standard)
- Foam-filled, non-marking rough terrain

#### Productivity Options

- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Hydraulic oil cooler
- Biodegradable hydraulic oil<sup>(1)</sup>
- Track & Trace<sup>(2)</sup> (GPS unit providing machine location & operating information)
- Motion alarm

#### Power Options

- AC generator (110 V / 60 Hz or 240 V/50 Hz, 3000 W)<sup>(1)</sup> with oil cooler
- Hydraulic generator 110 V/50 Hz or 240 V/ 50 Hz with oil cooler
- Diesel catalytic scrubber muffler<sup>(3)</sup>
- Low temperature cut-out module
- Engine heater <sup>(4)</sup>



07/15 Part No. B127284UK



### Access Platform Sales

Leewood Business Park, Upton, Huntingdon, Cambridgeshire PE28 5YQ, United Kingdom. Tel: 0845 108 4000 Fax: 01480 891162 Email: [sales@iapsgroup.com](mailto:sales@iapsgroup.com) [www.iapsgroup.com](http://www.iapsgroup.com)

### Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed maybe trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2015 Terex Corporation.