

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 10/35, BP 12/40



Light and manoeuvrable

Compact design and vibration dampened



Robust and reliable

V-belt all around protected against damage




Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in m3

BP 10/35 0,136

BP 12/40 0,167

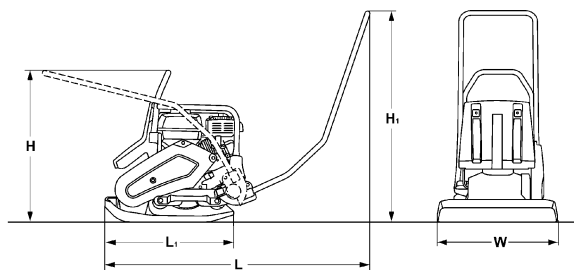

Standard Equipment

- ☒ Vibration insulated steering bow, foldable
- ☒ Detachable steering handle
- ☒ Highly wear resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Single point lifting device
- ☒ Protective covering
- ☒ 3-2-1 Warranty
- ☒ Engine protection frame

Optional Equipment

- ☐ Sprinkler system (+10kg)
- ☐ Sprinkler system 6l (+4kg/BP10/35)
- ☐ Transport wheels (+4kg)
- ☐ Plastic mat
- ☐ Tool kit
- ☐ Special painting
- ☐ Service Kit
- ☐ TOUGH WARRANTY
- ☐ Comfort guide handle

Dimensions in mm

	H	H1	H2	L	L1	W
BP 10/35	658	962	700	1084	532	350
BP 12/40	658	962	700	1084	542	400

Technical Data

Weights

Operating weight CECE	kg	65	72
Basic weight	kg	64	71

Dimensions

Working width	mm	350	400
---------------------	----	-----	-----

Driving Characteristics

Working speed, max.	m/min	25	25
Max. gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer	Honda	Honda
Type	GX 120	GX 120
Emission stage	CARB Phase III	CARB Phase III
Cooling	air	air
Number of cylinders	1	1
Performance SAE J 1349	kW	2,6
Speed	min-1	3.600
Drive system	mech.	mech.
Fuel	gasoline	gasoline
Fuel comsump. aver. during operation	l/h	0,9

Exciter system

Frequency	Hz	90	90
Centrifugal force	kN	10	12
Amplitude	mm	1,33	1,42

Capacities

Fuel	l	2,0	2,0
Water	l	13,5	13,5

Technical modifications reserved. Machines may be shown with options.



PRE 230 13 010

310118 Sa02

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

